

Guideline to EnergyPLAN Exercise 4:

Advanced Energy System Analysis: Excess diagrams

In Exercise 4, you are asked to make Excess Electricity, CO2 and Primary Energy Supply Diagrams of a predefined reference system and two alternatives. Such diagrams are able to show the ability of a given energy system to integrate fluctuating renewable energy sources such as wind power. For more information on the methodology, please consult the following articles:

- Henrik Lund. *Renewable Energy Systems. The Choice and Modeling of 100% Renewable Solutions.* Academic Press (Elsevier) 2010. [Link](#)
- Lund, H. *Excess electricity diagrams and the integration of renewable energy.* [International Journal of Sustainable Energy](#), Vol 23 (4), pp. 149-156.
- Lund, H. *Large-scale integration of wind power into different energy systems.* [Energy](#), Vol 30 (13), pp. 2402-2412.
- Lund, H. *Large-scale integration of optimal combinations of PV, wind and wave power into the electricity supply.* [Renewable Energy](#), Vol 31(4), pp 503-515, April 2006.

Exercise 4.1: Make an Excess Electricity Diagram of the Reference System

Open the EnergyPLAN model. Load the input data set “Denmark2030Reference.txt”, which is a model of a Danish “Business as usual” scenario made by the Danish Energy Authorities in year 2006. In the “Central Power Production” window set the import/export transmission at zero, in the “Balancing and Storage > Electricity” window remove any CEEP regulation strategies and in the Simulation window choose technical regulation strategy 1.

The annual electricity demand is 49 TWh/year and the expected wind power production is 14.87 TWh, divided into 3100 MW onshore producing 7.26 TWh/year and 1952 MW offshore producing 7.61 TWh/year.

Question 4.1.1: Identify (in the Variable Renewable Energy window) the wind power capacities which correspond to an annual production of 0 TWh, 5 TWh, 10 TWh etc. up to 50 TWh/year. Start with only onshore up to 4270 MW followed by additional offshore capacity. For each wind production, calculate the critical excess electricity production (CEEP), the CO2 emission and the Primary Energy Supply (PES), excluding the wind power RES.

Wind prod. TWh/year	Wind cap. MW	Offshore MW	CEEP TWh/year	PES excl.RES TWh/year	CO2-emission Mt/year
0	0	0	0	281,05	60,61
5					
10					
15					
20					
25					
30					
35					
40					
45					
50					

How to do exercise 4.1:


Step 1: Open the EnergyPLAN model and load the input data set “Denmark2030Reference.txt”.

The data set is part of the files, when you download the EnergyPLAN model. If for some reason, you do not have the data set, it can be downloaded from the following address:

http://www.energyplan.eu/wp-content/uploads/2014/06/EnergyPLAN_DK.zip.

Step 2: Save as exercise 4.


Step 3: Open the Simulation window:

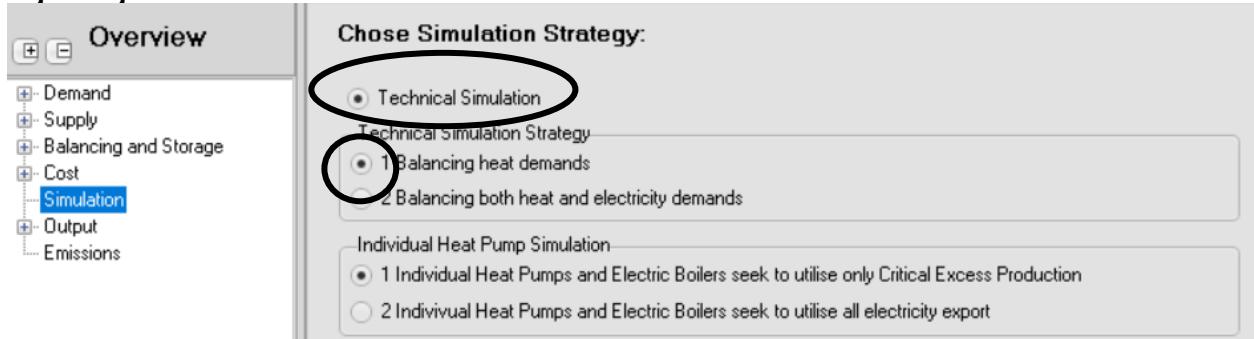

Choose Technical Optimisation


Choose technical regulation strategy 1

Open the Balancing and Storage > Electricity window

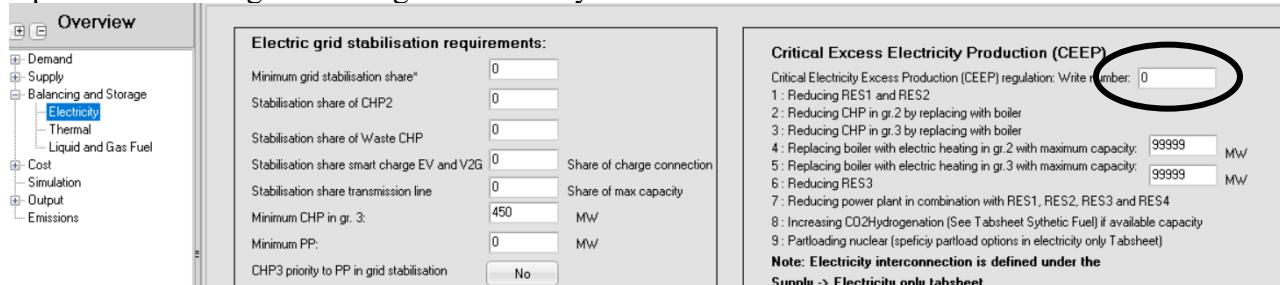

Set CEEP regulation at zero

Open the Supply > Central Power production window:

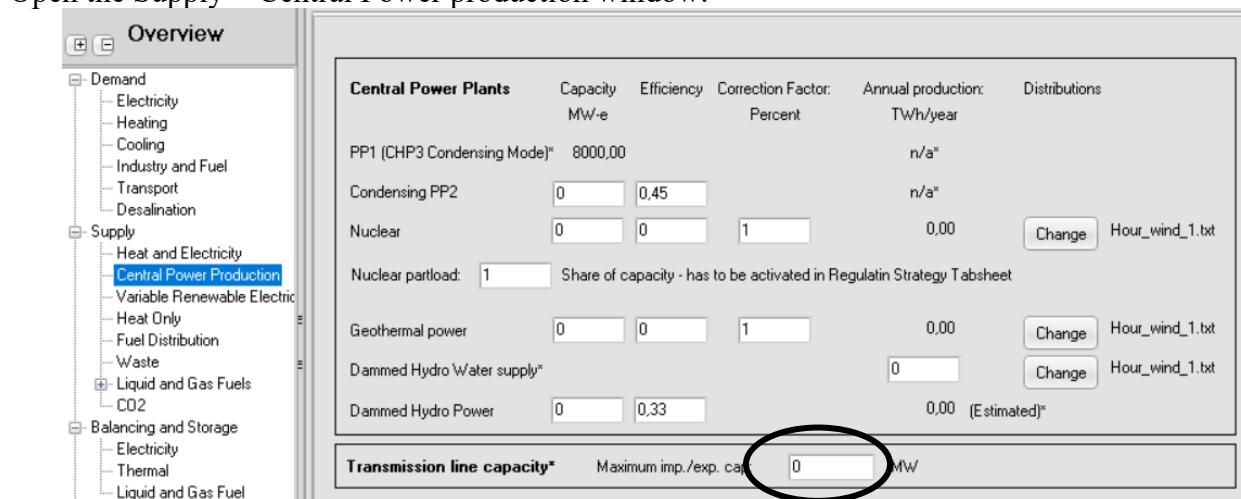

Set Maximum imp/exp. Capacity at zero

Step 4: Open the Supply > Variable Renewable Energy window:

The screenshot shows the 'Variable Renewable Electricity' window. On the left is a tree view of energy categories. In the main area, there's a table for 'Variable Renewable Electricity'. The 'Wind' row has its capacity set to 0 MW. A circled 'Change' button is located in the 'Wind' row under the 'Capacity' column.

Renewable Energy Source	Capacity: MW	Stabilisation share	Distribution profile*	Estimated Production TWh/year	Correction factor	Estimated Post Correction production	Estimated capacity factor
Wind	0	0	Change hour_wind_eltra2	0,00	0,28	0,00	0,00
Offshore Wind	0	0	Change hour_wind_eltra2	0,00	0,77	0,00	0,00
Photo Voltaic	0	0	Change hour_PV_eltra20t	0,00	0	0,00	0,00
Wave Power	0	0	Change Hour_wave_200t	0,00	0	0,00	0,00
Tidal	0	0	Change hour_tidal_power	0,00	0	0,00	0,00
Wave Power	0	0	Change Hour_wave_200t	0,00	0	0,00	0,00
CSP Solar Power	0	0	Change Hour_solar_prod1	0,00	0	0,00	0,00

Change all wind capacities to zero and calculate.

The electricity excess production is 0 TWh/year,

the CO2 emission is 60.61 Mt/year,

and the PES excluding RES is 281.07 TWh/year.

Step 5: Change wind capacities

Identify the wind power capacity of an annual production of 5 TWh and calculate.

The excess electricity production is 0.16 TWh/year,

the CO2 emission is 58.23 Mt/year,

and the PES is 276,83 TWh/year including RES and 271.81 excluding RES (wind power).

The screenshot shows the 'Variable Renewable Electricity' window. The 'Wind' row now has a capacity of 2135 MW. A circled 'Change' button is located in the 'Wind' row under the 'Capacity' column. Another circled 'Change' button is located in the 'Post Correction production' column for the 'Wind' row.

Renewable Energy Source	Capacity: MW	Stabilisation share	Distribution profile*	Estimated Production TWh/year	Correction factor	Estimated Post Correction production	Estimated capacity factor
Wind	2135	0	Change hour_wind_eltra2	4,19	0,28	5,00	0,27
Offshore Wind	0	0	Change hour_wind_eltra2	0,00	0,77	0,00	0,00
Photo Voltaic	0	0	Change hour_PV_eltra20t	0,00	0	0,00	0,00
Wave Power	0	0	Change Hour_wave_200t	0,00	0	0,00	0,00
Tidal	0	0	Change hour_tidal_power	0,00	0	0,00	0,00
Wave Power	0	0	Change Hour_wave_200t	0,00	0	0,00	0,00
CSP Solar Power	0	0	Change Hour_solar_prod1	0,00	0	0,00	0,00

Step 6: Continue and achieve the following results:

Wind prod. TWh/year	Wind cap. MW	Offshore MW	CEEP TWh/year	PES excl.RES TWh/year	CO2-emission Mt/year
0	0	0	0	281,05	60,61
5	2135	0	0,16	271,81	58,23
10	4270	0	1,08	264,03	56,23
15	4270	1283	2,78	257,74	54,62
20	4270	2566	5,36	253,11	53,43
25	4270	3849	8,62	249,78	52,57
30	4270	5132	12,35	247,33	51,94
35	4270	6415	16,37	245,45	51,46
40	4270	7698	20,61	244	51,09
45	4270	8981	25,03	242,89	50,8
50	4270	10264	29,58	242,03	50,58


Exercise 4.2: Use the model “Run serial calculation” function

Do the calculations of exercise 4.1 by using the model “Run serial calculation” function and achieve the same results faster. Load the results into an excel spreadsheet and design three diagrams with excess, PES and CO2 as functions of the wind power input. You find the “Run serial calculation” in the “Output > Overview” window. Note that you can only change one input value at the time. E.g set the RES1 onshore value to 4270 MW and change RES2 off-shore inputs from 0 to 10264 MW.

How to do exercise 4.2: Use the input file from exercise 4.1

Step 1: Make sure RES1 Wind capacity is 4270 MW in the Variable Renewable Energy window

Step 2: Open the Output > Overview window:

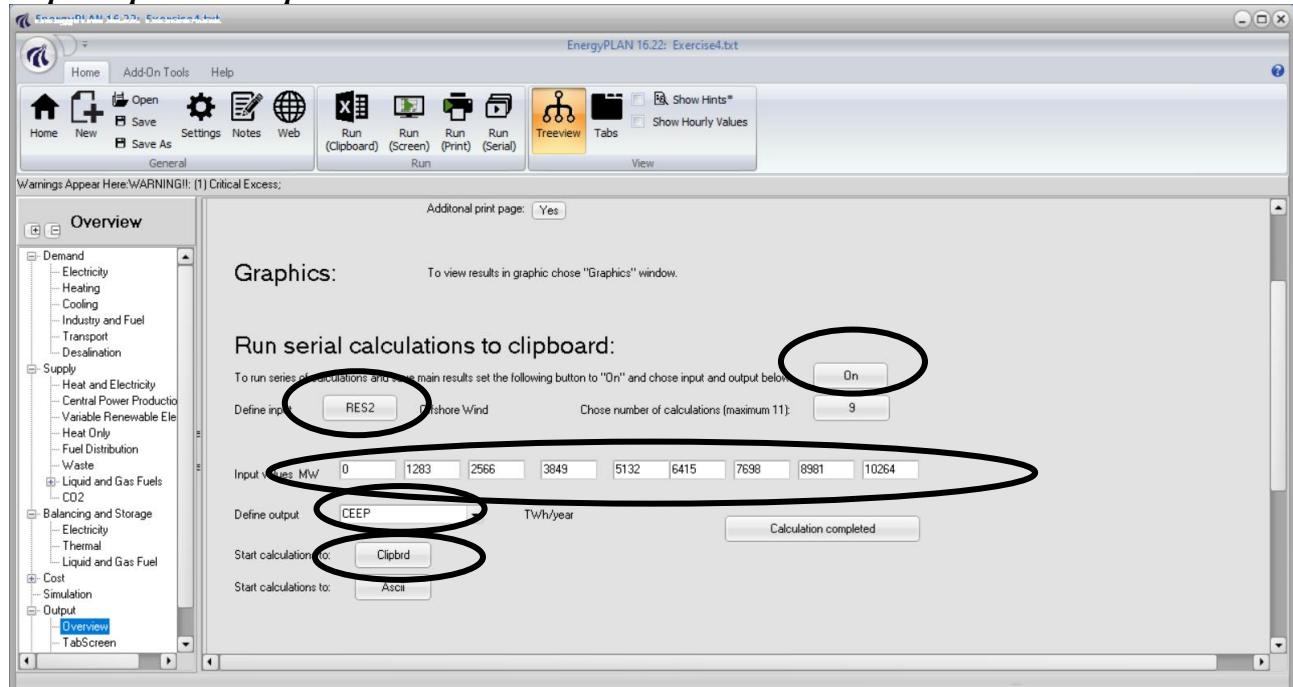

- 1) Set Run serial calculation at “On”, 2) Define input as “RES2”, 3) Type in the offshore capacity numbers, 4) Define output to CEEP, CO2 and Fuel excluding RES, respectively
- Start calculations by activating the “Clipbrd” button. The model will now start making 9 calculations and the requested result of each will be transferred to the clipbrd.


Step 3: Open Excel spreadsheet and load the data:

Wind prod. TWh/year	Wind cap. MW	Offshore MW	CEEP TWh/year	PES excl.RES TWh/year	CO2-emission Mt/year
0	0	0	0	281,05	60,61
5	2135	0	0,16	271,81	58,23
10	4270	0	1,08	264,03	56,23
15	4270	1283	2,78	257,74	54,62
20	4270	2566	5,36	253,11	53,43
25	4270	3849	8,62	249,78	52,57
30	4270	5132	12,35	247,33	51,94
35	4270	6415	16,37	245,45	51,46
40	4270	7698	20,61	244	51,09
45	4270	8981	25,03	242,89	50,8
50	4270	10264	29,58	242,03	50,58

Load the data into the excel spreadsheet and compare to the results of exercise 4.1
 Note that you can not include the first two results in the calculation, since the EnergyPLAN model can only change one value at the time.

Step 5: Repeat the procedure for CO2 and PES excluding RES.

Step 6: Make some diagrams in excel such as e.g.:

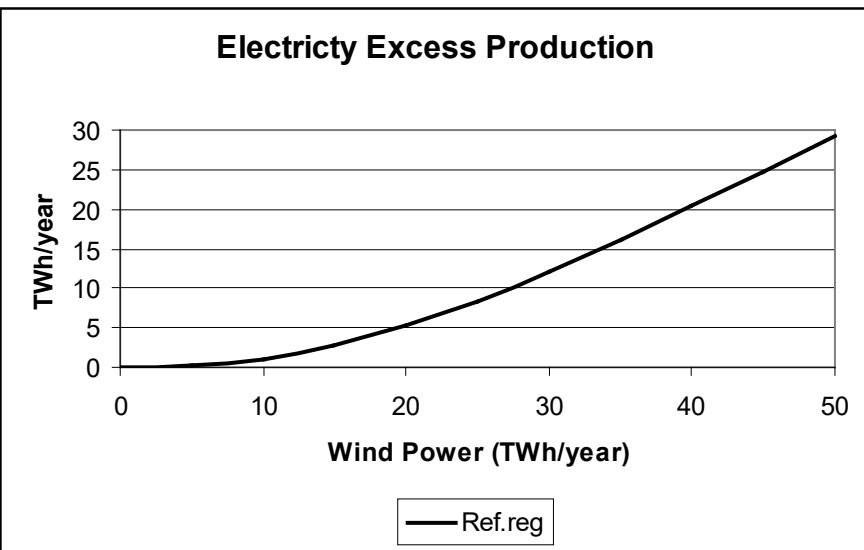

Exercise 4.3: Compare three different energy systems (open system)


Make an excess electricity diagram comparing the following three energy systems:

- System 1: The energy system of exercises 4.1 and 4.2
- System 2: System 1 with technical regulation strategy 2
- System 3: System 2 plus 500 MWe heat pumps with a COP of 3.5 (250 MW each in DH group 2 and 3). Replace existing 7 MW heat pump.

Make a Fuel Demand (Primary Energy Supply excl. RES) diagram of the same three systems.

How to do exercise 4.3: Use the input file from exercise 4.1

Repeat the guideline for exercise 4.2 and achieve the following results:

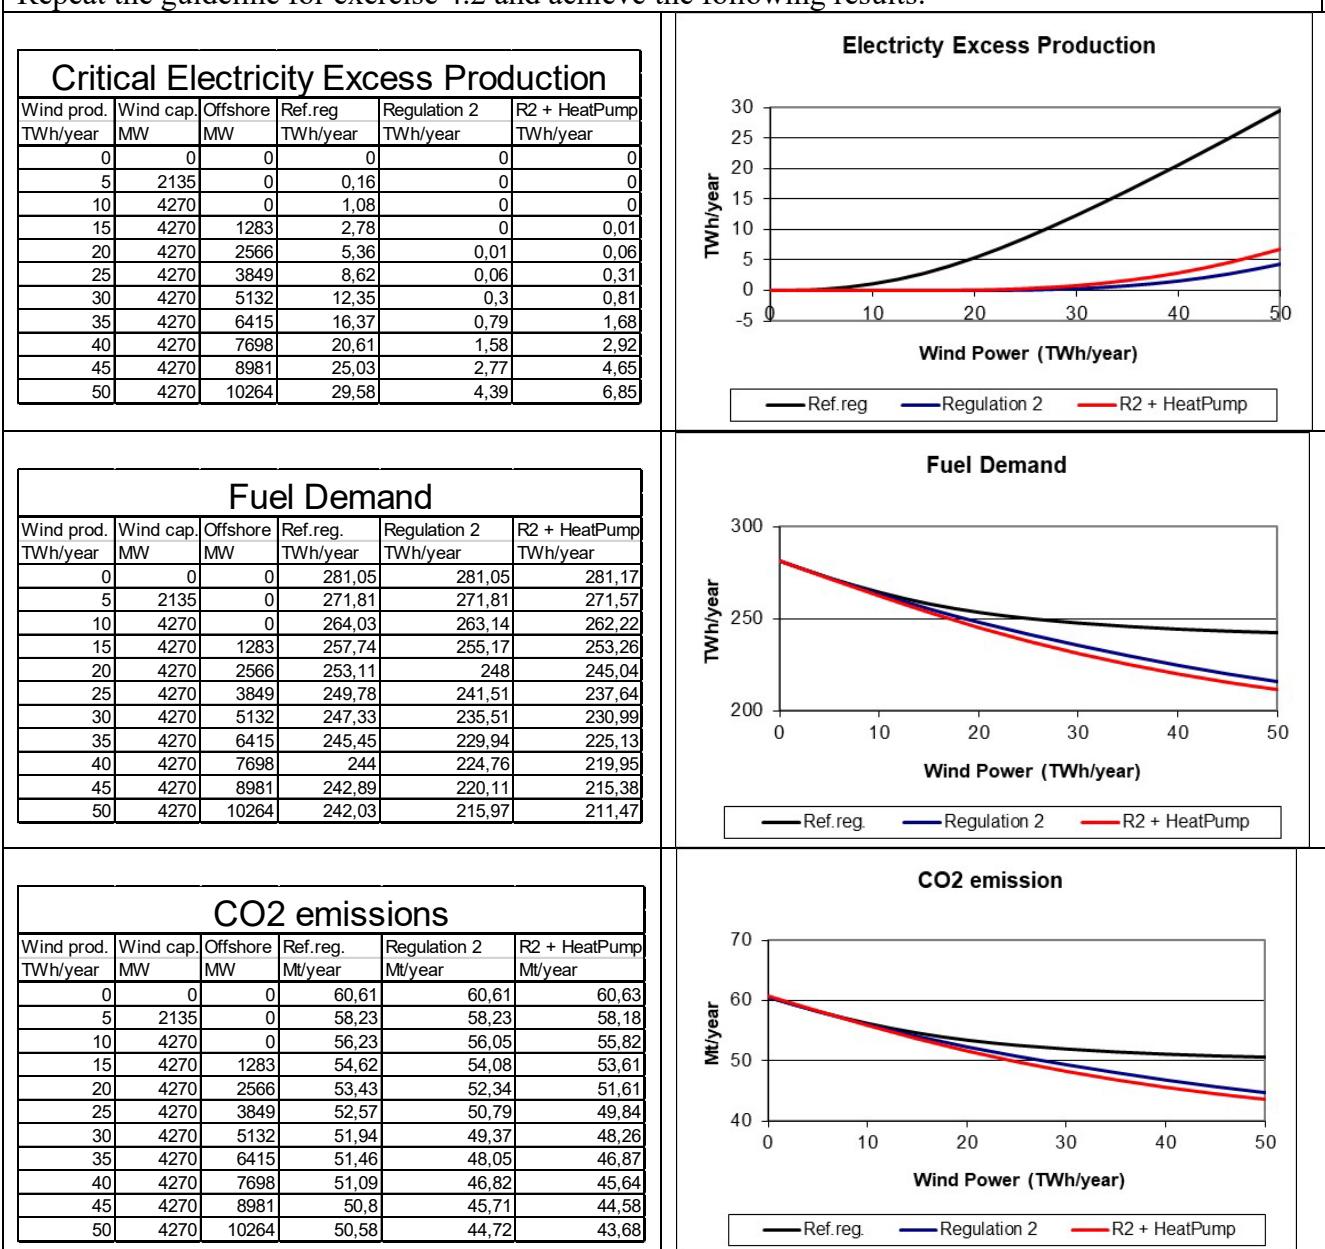

Exercise 4.4: Compare three different energy systems (Closed system)


In the previous exercises, the excess electricity production has been wasted. However, critical excess production is not allowed in the electricity supply. Therefore, you must activate the critical excess regulation in the “Balancing and Storage > Electricity” window and make the calculations of exercise 4.3 once again.

In the “Balancing and Storage > Electricity” window, choose the following CEEP regulation: 23457

Discuss the results of both exercise 4.3 and 4.4.

How to do exercise 4.4: Use the input file from exercise 4.3

Add CEEP regulation 23457 and repeat the guideline for exercise 4.3. Achieve the following results:

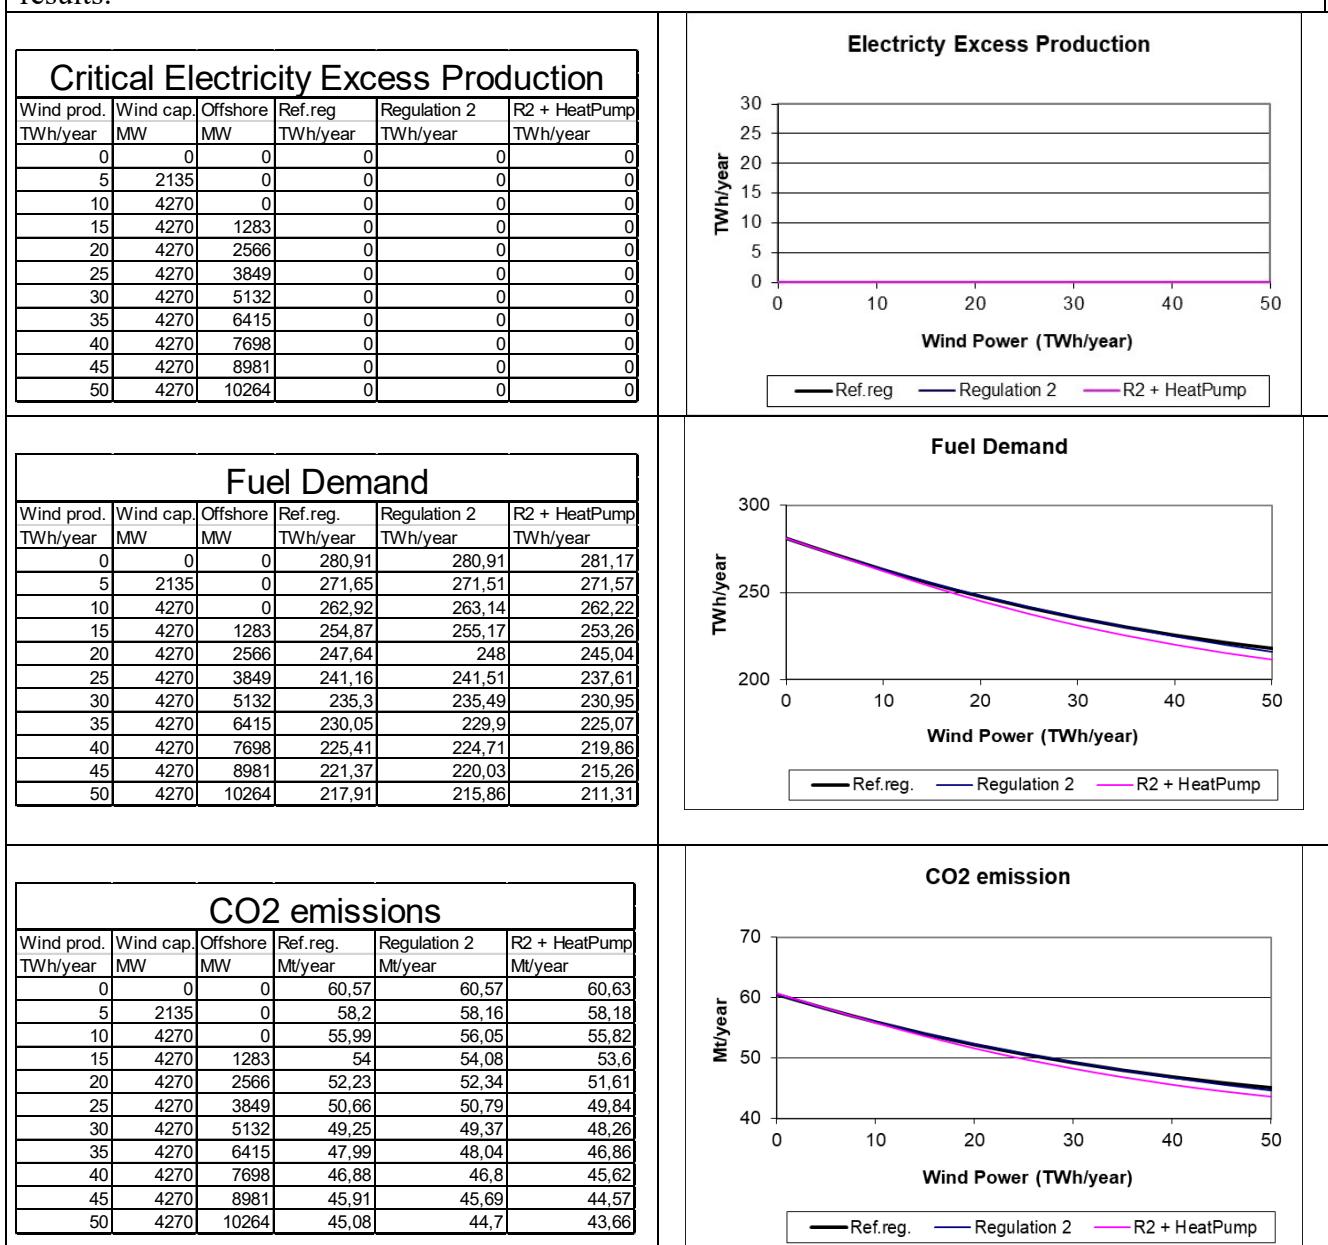

Exercise 4.5: Compare the three energy systems of IDA Energy Year 2006

Use the following input files of IDA energy year 2006:

- Danish Reference year 2030: "Denmark2030Reference.txt"
- IDA Energy Plan 2030: "Denmark2030Alternative.txt"
- IDA 100% Renewable Year 2050: "Denmark100%RES.txt"

Make an excess electricity production diagram and a Fuel Demand diagram comparing the three systems. Use the same wind power input as in the previous exercises from 0 to 50 TWh/year.

Remember to set import export transmission capacity at zero when making both diagrams. And remember to set wind power capacity at 4270 when doing the automatic calculations in the output window.

Moreover, remember to set CEEP regulation at zero when making the Excess diagram.

How to do exercise 4.5:					
Repeat the guideline for exercise 4.3 and 4.4 and achieve the following results:					
Critical Electricity Excess Production					
Wind prod. TWh/year	Wind cap. MW	Offshore MW	Reference20 TWh/year	IDA2030 TWh/year	IDA2050 TWh/year
0	0	0	0	0	0
5	2135	0	0,16	0	0
10	4270	0	1,08	0,01	0
15	4270	1283	2,78	0,06	0
20	4270	2566	5,36	0,38	0
25	4270	3849	8,62	1,22	0
30	4270	5132	12,35	2,75	0
35	4270	6415	16,37	5,08	0,36
40	4270	7698	20,61	8,04	1,47
45	4270	8981	25,03	11,43	3,16
50	4270	10264	29,58	15,12	5,67

Fuel Demand					
Wind prod. TWh/year	Wind cap. MW	Offshore MW	Reference20 TWh/year	IDA2030 TWh/year	IDA2050 TWh/year
0	0	0	281,05	155,42	104,3
5	2135	0	271,81	146,82	96,06
10	4270	0	264,03	139,36	88,21
15	4270	1283	257,74	132,48	80,62
20	4270	2566	253,11	126,3	73,06
25	4270	3849	249,78	121,12	65,72
30	4270	5132	247,33	116,84	58,55
35	4270	6415	245,45	113,59	52,38
40	4270	7698	244	111,12	47,42
45	4270	8981	242,89	109,18	43,3
50	4270	10264	242,03	107,6	40,32

Electricity Excess Production

TWh/year

Wind Power (TWh/year)

— Reference2030 — IDA2030 — IDA2050

Fuel Demand					
Wind prod. TWh/year	Wind cap. MW	Offshore MW	Reference20 TWh/year	IDA2030 TWh/year	IDA2050 TWh/year
0	0	0	281,05	155,42	104,3
5	2135	0	271,81	146,82	96,06
10	4270	0	264,03	139,36	88,21
15	4270	1283	257,74	132,48	80,62
20	4270	2566	253,11	126,3	73,06
25	4270	3849	249,78	121,12	65,72
30	4270	5132	247,33	116,84	58,55
35	4270	6415	245,45	113,59	52,38
40	4270	7698	244	111,12	47,42
45	4270	8981	242,89	109,18	43,3
50	4270	10264	242,03	107,6	40,32

Fuel Demand

TWh/year

Wind Power (TWh/year)

— Reference2030 — IDA2030 — IDA2050

Always REMEMBER to save your file under a new name e.g. exercise 4.